


# 19. 炭素鋼製・ステンレス鋼製油圧用管フランジ

JIS B2291

油圧用21MPa管フランジ


SHA型 SHB型 SSA型

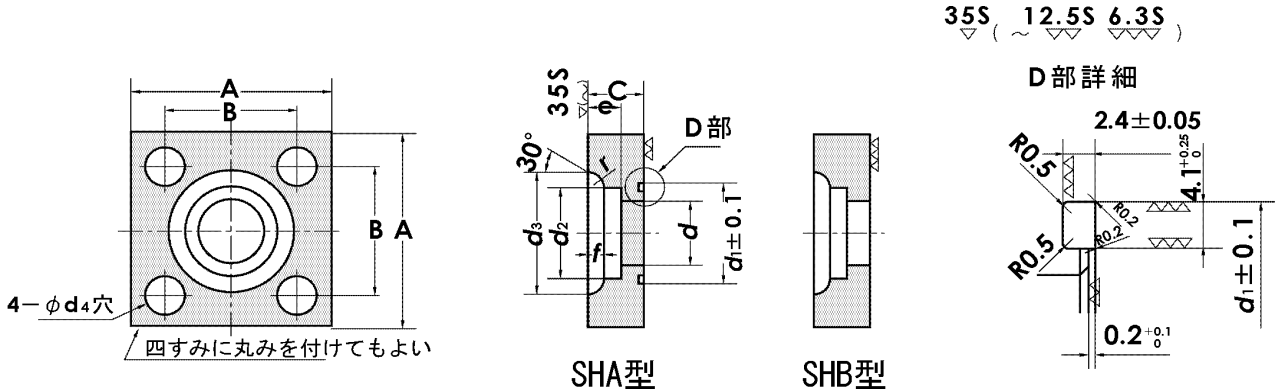

品番	SHA型	SHB型
	210S	211S

単位 mm

径の呼び	SHA型 SHB型														ボルト JIS B 1180	リング JIS B 2401		
	A	B	C		d	d1	d2	e	d3	d4	f	r						
1/2	63	±1	40	±0.2	22	0	16	30	±0.1	22.2	+0.2	11	32	11	3.5	5	M10	G25
3/4	68	±1	45		22	-1	20	35		27.7	0	12	38	11	4.0	5	M10	G30
1	80	±1.2	53	±0.2	28	0	25	40	±0.1	34.5	+0.3	14	45	13	4.0	5	M12	G35
1 1/4	90		±1.2		63	28	-1.5	31.5		45		43.2	16	56	13	6.0	5	M12
1 1/2	100	±1.5	70	±0.4	36	0	37.5	55	±0.1	49.1	0	18	63	18	7.0	5	M16	G50
2	112		±1.5		80	36	0	47.5		65		61.1	20	75	18	7.0	5	M16
2 1/2	140	±2	100	±0.4	45	-2	60	80	±0.1	77.1	+0.4	22	95	22	9.5	6	M20	G75
3	155		±2		112	45	-2	71		90		90.0	25	108	24	11.0	6	M22

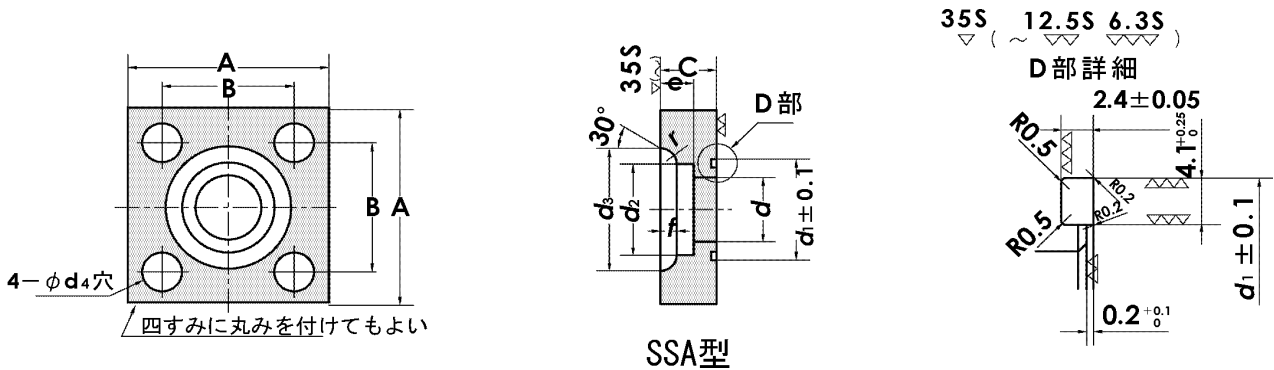

品番	SSA型
	212S

単位 mm

径の呼び	SSA型														ボルト JIS B 1176	リング JIS B 2401		
	A	B	C		d	d1	d2	e	d3	d4	f	r						
1/2	54	±1	36	±0.2	22	0	16	30	±0.1	22.2	+0.2	11	32	11	3.5	5	M10	G25
3/4	58	±1	40		22	-1	20	35		27.7	0	12	38	11	4.0	5	M10	G30
1	68	±1.2	48	±0.2	28	0	25	40	±0.1	34.5	+0.3	14	45	13	4.0	5	M12	G35
1 1/4	76		±1.2		56	28	-1.5	31.5		45		43.2	16	56	13	6.0	5	M12
1 1/2	92	±1.5	65	±0.4	36	0	37.5	55	±0.1	49.1	0	18	63	18	7.0	5	M16	G50
2	100		±1.5		73	36	0	47.5		65		61.1	20	75	18	7.0	5	M16
2 1/2	128	±2	92	±0.4	45	-2	60	80	±0.1	77.1	+0.4	22	95	22	9.5	6	M20	G75
3	140		±2		103	45	-2	71		90		90.0	25	108	24	11.0	6	M22